

EDGE LINEAR INTEGRAL TRI-CURVE 4' PERFORMANCE




LUMENS	WATTS	LM/W	CCT (K)	CRI
6604.2	42.03	157.13	4000	80

INTENSITY SUMMARY (candlepower)

ANGLE	0° ALONG	90° ACROSS
0	1936	1936
15	1834	1852
30	1559	1582
45	1141	1237
60	689	890
75	401	614
90	4	387
105	32	267
120	74	220
135	114	202
150	143	176
165	160	139
180	164	164


ISOFOOTCANDLE PLOT

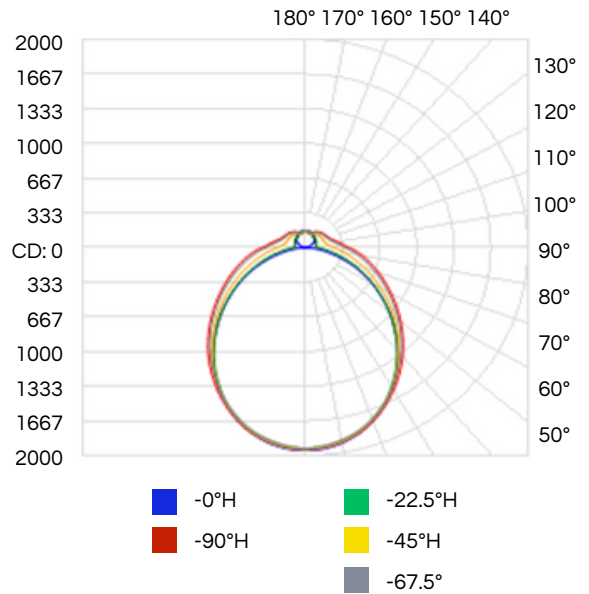

ZONAL LUMEN SUMMARY

ZONE	LUMENS	LUMINAIRE
0-30	1467.3	22.2%
0-40	2365.7	35.8%
0-60	4091.1	61.9%
0-90	5554.3	84.1%
90-180	1049.9	15.9%
0-180	6604.2	100%

POLAR CANDELA DISTRIBUTION

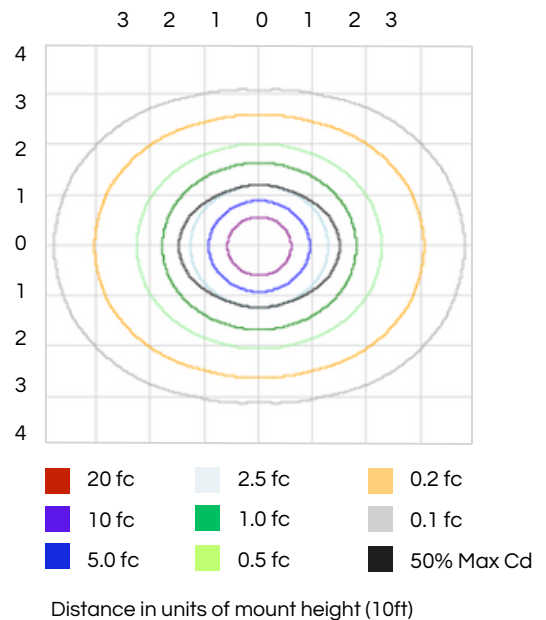

ILLUMINANCE AT A DISTANCE

MOUNTED HEIGHT	CENTER BEAM fc	BEAM WIDTH	
1.7'	670	4.1'	4.1'
3.3'	178	8.0'	9.9'
5.0'	77.4	12.2'	15.0'
6.7'	43.1	16.3'	20.1'
8.3'	28.1	20.2'	24.9'
10.0'	19.4	24.3'	29.9'

■ Vertical 101.2°
■ Horizontal 112.5°

Revised: July 14, 2023

LANTANA LED
114 Sansome St. Suite 1320
San Francisco, CA 94104

415-814-4500
sales@lantanaled.com
m
www.lantanaled.com




Specifications subject to change without notice.
Visit lantanaled.com for the most current specifications.

EDGE LINEAR REMOTE TRI-CURVE 4' PERFORMANCE




LUMENS	WATTS	LM/W	CCT (K)	CRI
6857.4	44.09	155.5	4000	80

ANGLE	0° ALONG	90° ACROSS
0	1966	1966
15	1880	1882
30	1589	1607
45	1169	1265
60	711	914
75	283	627
90	4	395
105	37	291
120	87	243
135	135	226
150	171	199
165	193	192
180	198	198

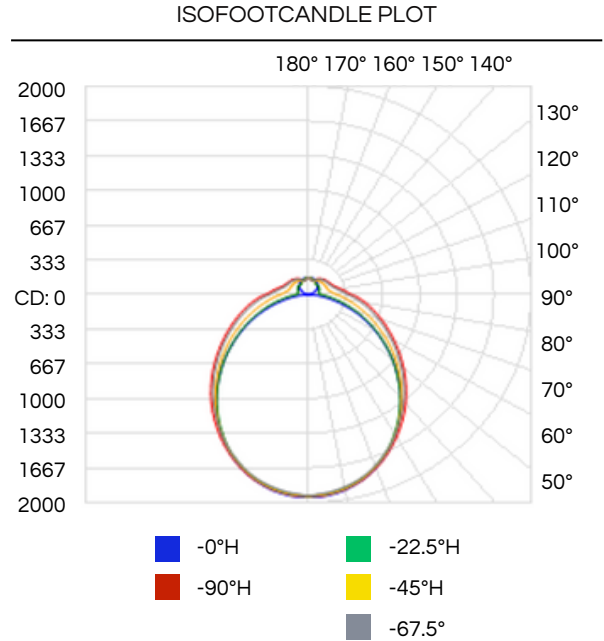

ZONE	LUMENS	LUMINAIRE
0-30	1493.0	21.8%
0-40	2409.1	35.1%
0-60	4177.5	60.9%
0-90	5683.5	82.9%
90-180	1173.9	17.1%
0-180	6857.4	100%

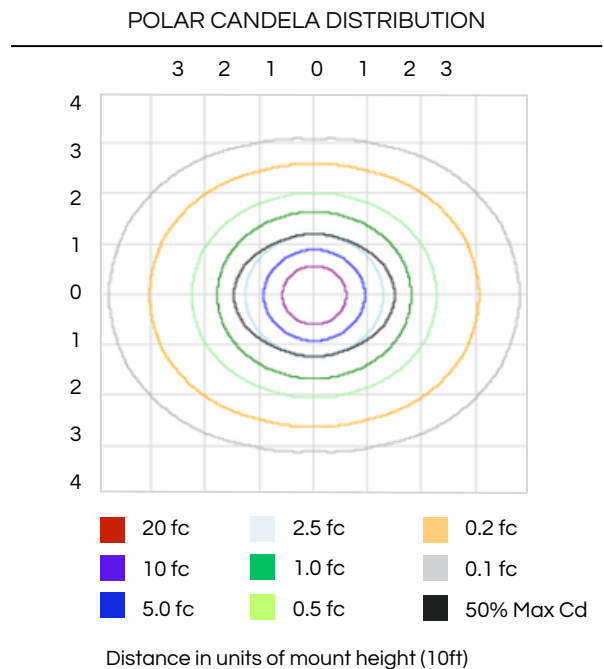

MOUNTED HEIGHT	CENTER BEAM fc	BEAM WIDTH	
1.7'	680	4.2'	5.1'
3.3'	181	8.1'	10.0'
5.0'	78.6	12.3'	15.1'
6.7'	43.8	16.5'	20.2'
8.3'	28.5	20.4'	25.0'
10.0'	19.7	24.6'	30.2'

■ Vertical 101.8°
■ Horizontal 112.9°

Distance in units of mount height (10ft)