

EDGE TROFFER INTEGRAL 2X2 PERFORMANCE


LUMENS	WATTS	LM/W	CCT (K)	CRI
10817.3	71.37	151.6	4000	80



INTENSITY SUMMARY (candlepower)

ANGLE	0° ALONG	90° ACROSS
0	4168	4168
15	3946	3978
30	3281	3470
45	2337	2661
60	1365	1683
75	554	737
90	0	0
105	0	0
120	0	0
135	0	0
150	0	0
165	0	0
180	0	0


ISOFOOTCANDLE PLOT

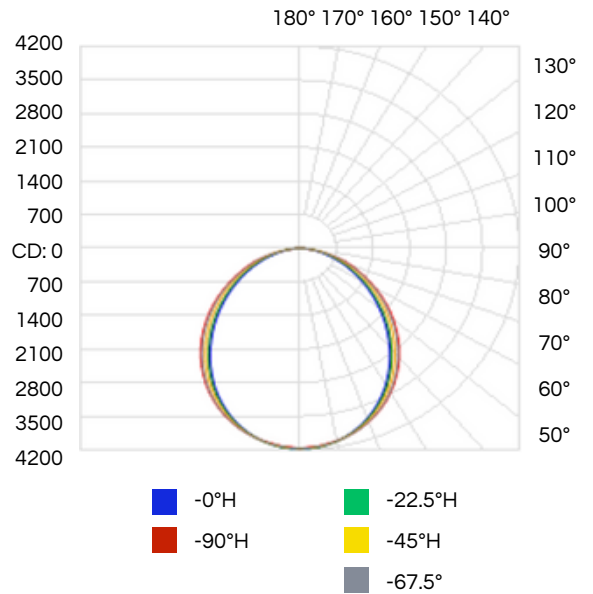

ZONAL LUMEN SUMMARY

ZONE	LUMENS	LUMINAIRE
0-30	3176.7	29.4%
0-40	5122.7	47.4%
0-60	8718.6	80.6%
0-90	10817.3	100%
90-180	0.0	0%
0-180	10817.3	100%

POLAR CANDELA DISTRIBUTION

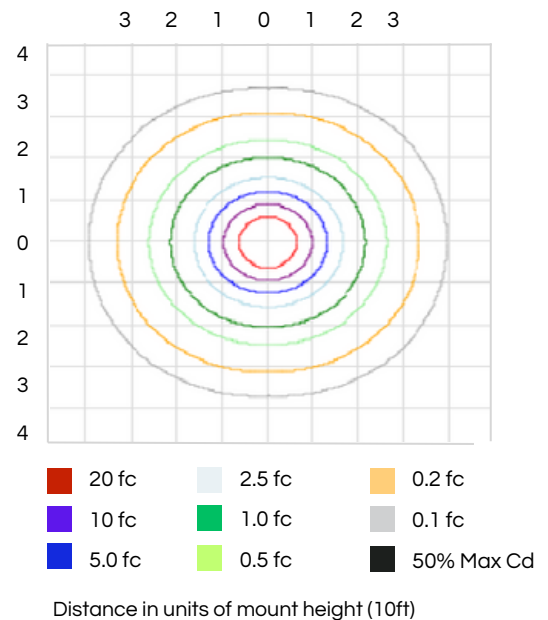

ILLUMINANCE AT A DISTANCE

MOUNTED HEIGHT	CENTER BEAM fc	BEAM WIDTH	
1.7'	1442	3.9'	4.7'
3.3'	383	7.5'	9.1'
5.0'	167	11.4'	13.7'
6.7'	92.9	15.3'	18.4'
8.3'	60.5	19.0'	22.8'
10.0'	41.7	22.8'	27.4'

■ Vertical 97.6°
■ Horizontal 107.8°

EDGE TROFFER INTEGRAL 2X4 PERFORMANCE




LUMENS	WATTS	LM/W	CCT (K)	CRI
22235.5	144.1	154.3	4000	80

INTENSITY SUMMARY (candlepower)

ANGLE	0° ALONG	90° ACROSS
0	8396	8396
15	8008	8036
30	6777	6990
45	4935	5362
60	2917	3403
75	1199	1507
90	0	0
105	0	0
120	0	0
135	0	0
150	0	0
165	0	0
180	0	0


ISOFOOTCANDLE PLOT

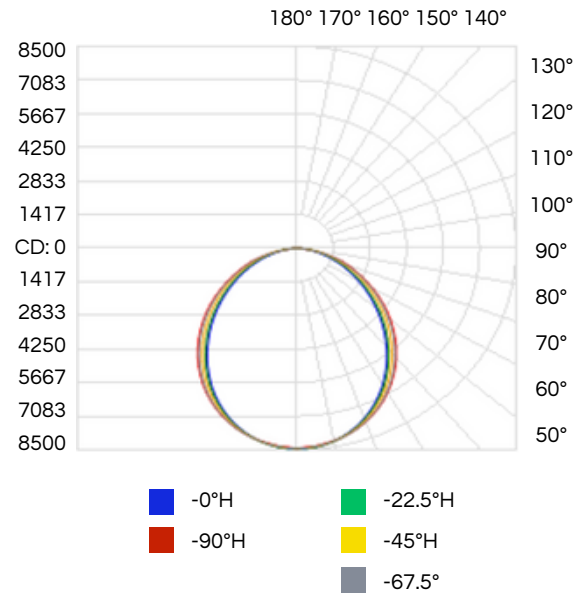

ZONAL LUMEN SUMMARY

ZONE	LUMENS	LUMINAIRE
0-30	6429.7	28.9%
0-40	10402.4	46.8%
0-60	17823.9	80.2%
0-90	22235.5	100%
90-180	0	0%
0-180	22235.5	100%

POLAR CANDELA DISTRIBUTION

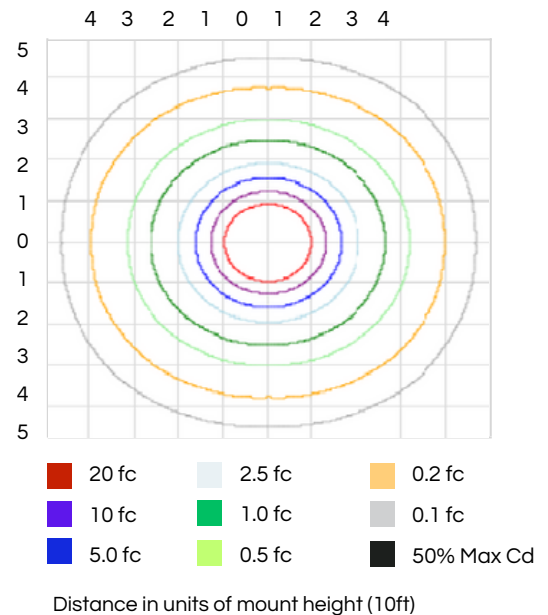


ILLUMINANCE AT A DISTANCE

MOUNTED HEIGHT	CENTER BEAM fc		BEAM WIDTH	
	Vertical 100.7°	Horizontal 107.9°		
1.7'	2905	84	4.1'	4.7'
3.3'	771	122	8.0'	9.1'
5.0'	336	187	12.1'	13.7'
6.7'	187	250	16.2'	18.4'
8.3'	122	336	20.0'	22.8'
10.0'	84	450	24.1'	27.5'

Vertical 100.7°
Horizontal 107.9°

EDGE TROFFER REMOTE STATIC CIRCADIAN 2X2 PERFORMANCE

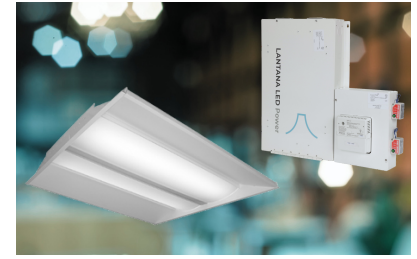


LUMENS	WATTS	LM/W	CCT (K)	CRI
5209.8	49.50	105.3	5000	98.9

INTENSITY SUMMARY (candlepower)

ANGLE	0° ALONG	90° ACROSS
0	2011	2011
15	1900	1915
30	1576	1671
45	1124	1281
60	660	813
75	271	359
90	0	0
105	0	0
120	0	0
135	0	0
150	0	0
165	0	0
180	0	0


ISOFOOTCANDLE PLOT

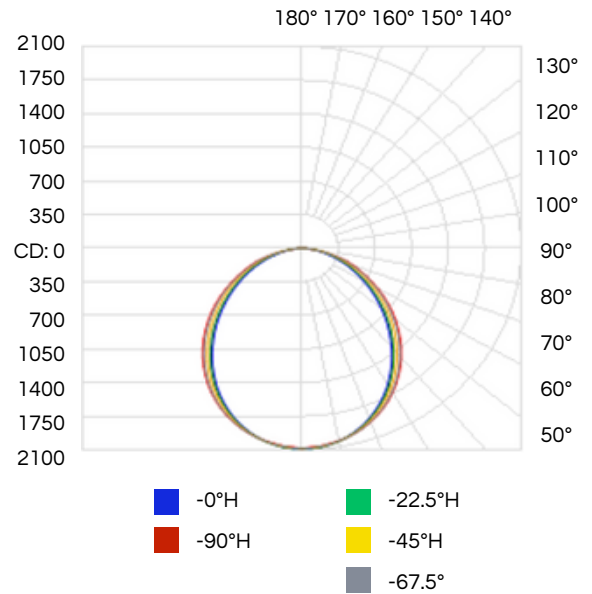

ZONAL LUMEN SUMMARY

ZONE	LUMENS	LUMINAIRE
0-30	1529.5	29.4%
0-40	2464.5	47.3%
0-60	4194.6	80.5%
0-90	5209.8	100%
90-180	0.0	0%
0-180	5209.8	100%

POLAR CANDELA DISTRIBUTION

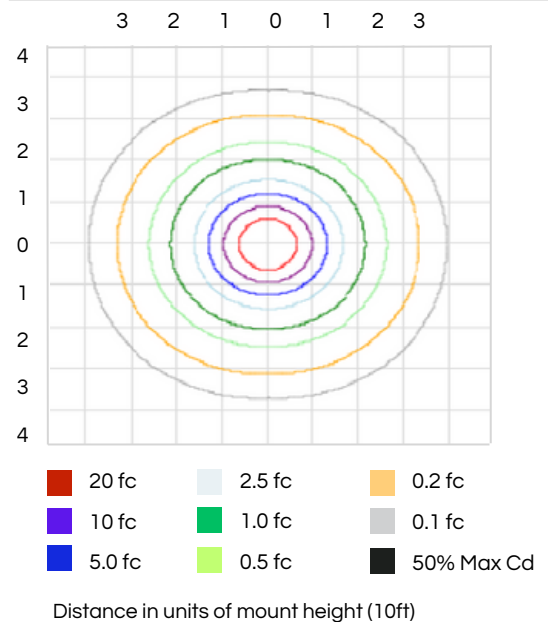

ILLUMINANCE AT A DISTANCE

MOUNTED HEIGHT	CENTER BEAM fc	BEAM WIDTH	
1.7'	696	3.9'	4.6'
3.3'	185	7.5'	9.0'
5.0'	80.4	11.4'	13.7'
6.7'	44.8	15.2'	18.3'
8.3'	29.2	18.9'	22.7'
10.0'	20.1	22.7'	27.3'

Vertical 97.3°
Horizontal 107.6°