




ARCHITECTURAL INTEGRAL QUICK-SHIP

Evenly illuminate spaces with single-channel direct and indirect LED fixtures with integrated Class 2 drivers (120/277V). UL 924-rated fixtures have an onboard battery backup that meets illumination requirements during failures of normal power operations. Includes mounting hardware for Unistrut and Pendant with aircraft cable and whip for 5' drop. Surface mounting is an additional cost and features a slide-in rail-mounted system that integrates seamlessly with the fixture profile allowing direct surface attachment to the ceiling.

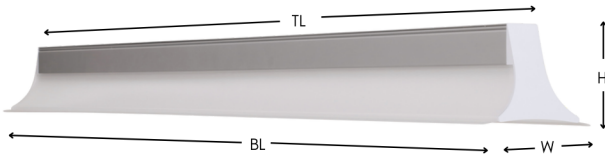

Extruded anodized clear satin aluminum spine with acrylic diffusing lens and molded endcaps.

SPECIFICATIONS	
Ambient Operating Temp	50° C
Indirect Lighting	25%
Direct Lighting	75%
UL 924	with Battery Backup
UL 1598	Yes
Lumens per watt 80 CRI	164.7
Lumens per watt 90 CRI	136.7
TAA Compliant	Yes
DLC Listed	Yes
Dimming	Down to 1%
Warranty	10-Year
Lumen Maintenance	71,000 hours

Mount	Top Length (TL)	Bottom Length (BL)	Height (H)	Width (W)	Weight
Pendant / Unistrut	46.2"	48.2"	4"	5.5"	6.2 lb
	92.2"	94.2"	4"	5.5"	12 lb
Surface	45.9"	48.2"	4.6"	5.5"	8.9 lb
	91.9"	94.2"	4.6"	5.5"	16 lb

DELIVERED LUMENS				
Length	Lumen Pkg	80 CRI	90 CRI	Total Watts
4'	L41	3241	2690	20
	L42	4861	4035	30
	L43	6482	5380	40
8'	L81	6482	5380	40
	L82	9722	8070	60
	L83	12963	10759	80



The integral Quick-Ship fixture ships within 10 business days from order placement. *Only available in White 4' and 8' with 3500K or 4000K. Maximum quantity 25.

FIXTURE	LENGTH	LUMEN PKG	MOUNT	COLOR	VOLTAGE	WIRE	WHIP	CRI	FINISH	FEED
IQS - Integral	4 - 4 Ft	L41, L42, L43	P - Pendant	35 - 3500K	U - 120/277V	3 - 3-Wire 5 - 5-Wire	W - White G - Gray B - Black	80 90	CW - Clear / White Endcaps	TF - Top SF - Side
	8 - 8 Ft	L81, L82, L83	U - Unistrut S - Surface	40 - 4000K						
IQS	4	L43	P	35	U	3	W	90	CW	TF