


# EDGE VAPOR TIGHT

4', 8'  
 UL 924, UL 1598, UL 2108  
 Sustainably Constructed  
 Withstands Harsh Conditions  
 Advanced Dimming  
 Low/High Output  
 L90>71,000  
 Human-Centric Options  
 5-Year Warranty

UL Certified for Elevated Ambient  
 Operating Temperatures  
 60°C Remote  
 55°C Integral

Remote Distributed Low Voltage  
 Integral Class 2 Driver 120-277V  
 Integral w/Onboard Emergency Battery Backup

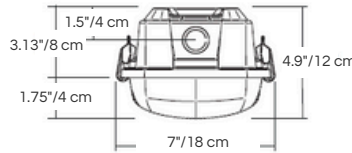

Weight	
Integral 4'	10 lbs / 5 kg
Integral 8'	21 lbs / 9 kg
Remote 4'	9 lbs / 4 kg
Remote 8'	19 lbs / 9 kg

## LUMEN PACKAGES Delivered Lumens tested at 4000K 80 CRI

4' & 8' Standard Output					8' High Output (not available with emergency)				
SKU	Total Watts	159 Lm/W 80 CRI	132 Lm/W 90 CRI	110 Lm/W 97 CRI	SKU	Total Watts	159 Lm/W 80 CRI	132 Lm/W 90 CRI	110 Lm/W 97 CRI
L1	19	3036	2520	2092	L12	81	12879	10790	9064
L2	25	3995	3316	2755	L13	88	13992	11620	9847
L3	31	4954	4112	3416	L14	94	14946	12450	10519
L4	38	6072	5040	4188	L15	100	15900	13280	11190
L5	44	7031	5836	4849	L16	106	16854	14110	11861
L6	50	7990	6632	5510	L17	113	17967	14940	12645
L7	56	8949	7427	6171	L18	119	18921	15770	13316
L8	63	10067	8356	6943	L19	125	19875	16600	13988
L9	69	11026	9151	7604	L20	131	20829	17430	14659
L10	71	11346	9417	7824	L21	138	21942	18260	15442
L11	75	11985	9947	8265					

## ORDERING INFORMATION

FIXTURE	POWER	SIZE	MOUNT	LUMENS	COLOR	CRI	INTEGRAL WHIP	INTEGRAL FEED
EVPT-Edge Vapor Tight	I-Integral	4-4 Foot	P-Pendant	L1- L7- L12- L17-	30-3000K	80-80+ CRI	0-None	TFC-Top Feed Center
	IEM-Integral Emergency	8-8 Foot	S-Surface	L2- L8- L13- L18-	35-3500K	90-90+ CRI	3-No Dim	TFE-Top Feed End
	R-Remote		U-Unistrut	L3- L9- L14- L19-	40-4000K	97-Circadian	5-Dim	SF-Side Feed
				L4- L10- L15- L20-	50-5000K		3E-No Dim EM On	
				L5- L11- L16- L21-	65-6500K		4E-No Dim EM On/Off	
				L6-	DC-Dynamic Circadian		5E-Dim EM On	
							6E-Dim EM On/Off	