

NEOTERIC SLIM LINEAR

12" - 96" / 30.48 cm - 243.84 cm
 Remote DLVP, Integral
 Sustainably Constructed
 Advanced Dimming 0-10V, Down to 10%
 Up to 119 Lm/W
 UL 1598, UL 2108
 L90>71,000
 10-Year Warranty


Canopy w/ Class 2 Driver 120-277V
 Remote Distributed Low Voltage



Available Colors



Suspension Length for Pendant: 6 feet / 183 cm
 End Caps: 3" - 7.62 cm
 Length: 12"/30.48 cm MIN / 96"/243.84 cm MAX
 Width: 1.53" - 3.89 cm
 Height: 0.53" - 1.35 cm
 Weight: 0.4 lbs/ft - 0.6 kg/m

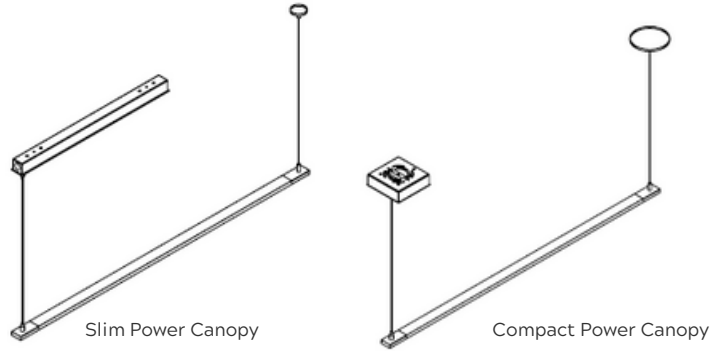

LUMEN PACKAGES Delivered Lumens tested at 4000K 80 CRI

Size	SKU	119 Lm/W 80 CRI	99 Lm/W 90 CRI	Total Watts/Foot
Available in 6"/15 cm increments up to 96"/244 cm Minimum 12" (lumens calculated per foot)	L1	716	594	6
	L2	954	792	8
	L3	1193	990	10

Compact Power Canopy Only Available in the Following Sizes:

- L1- 24-96" / 61-244 cm
- L2- 18-84" / 46-213 cm
- L3- 18-66" / 46-168 cm

ORDERING INFORMATION

FIXTURE	POWER	SIZE	LENS	MOUNTING
NSL-Neoteric Slim Linear	R-Remote** CC-Compact Power Canopy w/ driver SC-Slim Canopy w/ driver	##-in inches	DW-Diffused White	P-Pendant S-Surface*
LUMENS	COLOR	CRI	Finish	
L1-	27-2700K	80-80+ CRI	CW-Clear Anodized Aluminum	
L2-	30-3000K	90-90+ CRI	BL-Black Anodized Aluminum	
L3-	35-3500K		CC-Custom Color	
L4-	40-4000K		(certain restrictions apply)	
L5-	50-5000K 65-6500K			

*Surface available for remote power only

**requires RDU or programmed single driver in splice box